



Oil Tools


sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



'SLIMCONNECT' EXTERNAL SLIP CONNECTOR

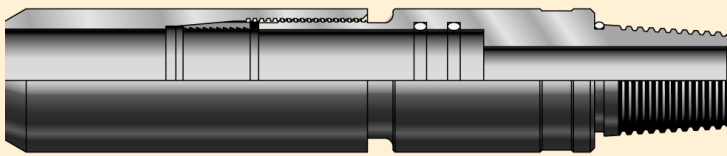

The 'Slimconnect' External Slip Connectors allow the attachment of coiled tubing to the CT Tool Workstring, via the provision of a threaded connection.

The 'Slimconnect', as its name suggests, has an O.D. which is smaller than a standard 'Torconnect'. This enables the 'Slimconnect' to be used in operations where a maximum diameter of coiled tubing is required to be run in a minimal I.D. restriction.

The design of the 'Slimconnect' utilizes a set of helical 'wicker' type slips that grip the tubing in a 'wedging' action, thus, an increase in tension results in increased grip.

DESIGN FEATURES/ BENEFITS

- ▶ High tensile strength for size.
- ▶ Slimline body O.D.
- ▶ Internal pressure seal.
- ▶ Replaceable slips.

SERVA Specification Guide Torconnect External Slip Coil Connector

Coiled Tubing Diameter (in)	Max OD (in)	Min ID (in)	Thread	Part Number
1 1/4	1.687	0.750	1" AMMT	2191125322
1 1/2	2.125	1.000	1.5" AMMT	2191150322
1 3/4	2.375	1.000	1.5" AMMT	2191175322
2	2.875	1.500	2 3/8" PAC	2191200322
2 3/8	3.125	1.500	2 3/8" PAC	2191237322
2 7/8	3.625	1.500	2 7/8" PAC	2191287322

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—SERVAgroup.com