



Oil Tools


sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



F PROFILE NIPPLE BOX X PIN

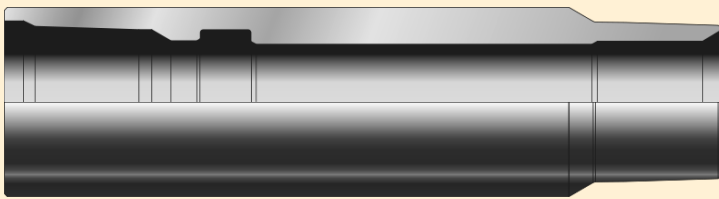

The Model "F" Profile Nipple is a TOP NoGo Nipple that provides for the location of various wireline flow control devices in the production string.

APPLICATIONS

- ▶ Land blanking plugs to shut in well or to test the production tubing.
- ▶ Land Velocity Type Safety Valves.
- ▶ Land equalizing check valves.
- ▶ Land circulating blanking plugs.
- ▶ Land chokes to reduce surface flowing pressures.
- ▶ Land instrument hangers with geophysical devices, such as, pressure and temperature recorders.

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—SERVAgroup.com



Oil Tools

sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



F PROFILE NIPPLE BOX X PIN



SERVA Specification Guide F Profile Nipple Box X Pin

Size (in)	OD (in)	Seal Bore (in)	Pressure (psi)	Connection thread	Part Number
2.375	3.063	1.781	10,000	2 3/8" EUE	2122178532
2.375	3.063	1.812	10,000	2 3/8" EUE	2122181532
2.375	3.063	1.875	10,000	2 3/8" EUE	2122187532
2.875	3.668	2.250	10,000	2 7/8" EUE	2122225532
2.875	3.668	2.312	10,000	2 7/8" EUE	2122231532
2.875	4.500	2.750	10,000	3 1/2" EUE	2122275532
3.500	4.500	2.812	10,000	3 1/2" EUE	2122281532

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—SERVAgroup.com