



Oil Tools


sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



XN PROFILE NIPPLE BOX X PIN

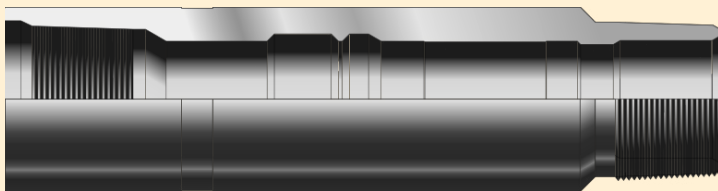

The Model "XN" Profile Nipple is a BOTTOM NoGo Nipple that provides for the location of various wireline flow control devices in the production string.

APPLICATIONS

- ▶ Land blanking plugs to shut in well or to test the production tubing.
- ▶ Land Velocity Type Safety Valves.
- ▶ Land equalizing check valves.
- ▶ Land circulating blanking plugs.
- ▶ Land chokes to reduce surface flowing pressures.
- ▶ Land instrument hangers with geophysical devices, such as, pressure and temperature recorders.
- ▶ Restricted I.D. catches tools dropped during wireline work.

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—SERVAgroup.com



Oil Tools


sales@ServaOilTools.com

ServaOilTools.com

+1 (940) 503-4437



XN PROFILE NIPPLE BOX X PIN

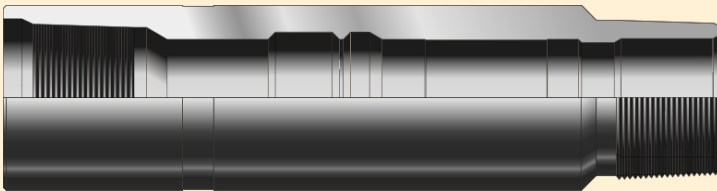

SERVA Specification Guide XN Profile Nipple Box X Pin

Size (in)	OD (in)	Seal Bore (in)	NoGo ID (in)	Pressure (psi)	Connection thread	Part Number
1.900	2.200	1.500	1.448	10,000	1.90" EUE	2122150432
2.375	2.750	1.875	1.791	10,000	2 3/8" EUE	2122187432
2.875	3.300	2.313	2.205	10,000	2 7/8" EUE	2122231432
3.500	4.000	2.750	2.635	10,000	3 1/2" EUE	2122275432
3.500	4.000	2.813	2.666	10,000	3 1/2" EUE	2122281432

One company at the center of the energy revolution is uniquely equipped with the know-how and ingenuity to make possibilities happen—SERVAgroup.com